DRAFT FLASHING ORDER

FO-001001 · export 1 · 2026-10-14

FROM
Blue Leaf Building (sandbox)
Sandbox address
00 0000 0000
office@example.invalid

SUPPLIER
Fielders (SANDBOX — not a real contact)
Attn: Sandbox orders
00 0000 0000
orders@example.invalid

JOB
Sandbox job — your drawings (Takeoff test)
Deliver to:
1 Example Street, Testville (synthetic)
Required: 2026-10-27
Site contact: Site lead 0400 000 000


Notes: Example order — synthetic data

All dimensions in mm. Lengths are FINISHED order lengths. Girth is indicative only (no bend deduction) — supplier fabrication instructions take precedence.

P1 — Apron flashing

COLORBOND · Monument · 0.55 BMT · solid

Confirm availability with supplier

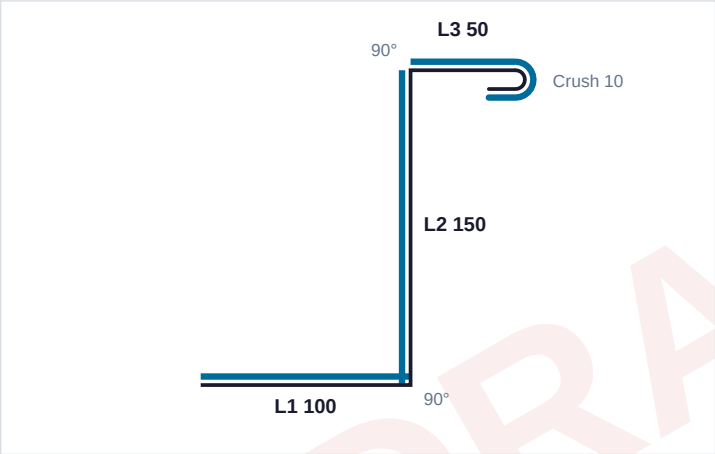

Painted (colour) face — left side travelling L1 -> L3

DIMENSIONS
L1 100 mm
L2 150 mm
L3 50 mm
B1 90° fold left
B2 90° fold right
Start: plain
End: crush fold (closed hem) 10 mm, folds right
Indicative girth 310 mm

QTY	FINISHED LENGTH (mm)	LM	HANDLING
1 ×	6,100	6.100	Long piece — handle with care
2 ×	4,600	9.200	-
1 ×	3,200	3.200	-

4 pieces · 18.500 LM

DRAFT


DRAFT FLASHING ORDER

FO-001001 · export 1 · 2026-10-14 (continued)

P2 — Barge flashing

COLORBOND · Surfmist · 0.55 BMT · solid

Confirm availability with supplier

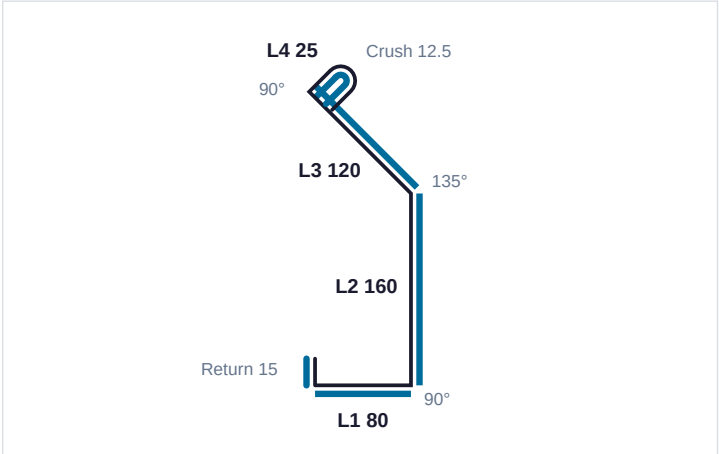

Painted (colour) face — right side travelling L1 -> L4

DIMENSIONS

L1 80 mm
L2 160 mm
L3 120 mm
L4 25 mm
B1 90° fold left
B2 135° fold left
B3 90° fold right
Start: open return 15 mm, folds left
End: crush fold (closed hem) 12.5 mm, folds right
Indicative girth 412.5 mm


QTY	FINISHED LENGTH (mm)	LM	HANDLING
2 ×	4,600	9.200	-
2 ×	3,700	7.400	-
4 ×	2,400	9.600	-

8 pieces · 26.200 LM

P3 — Capping (unpainted)

ZINCALUME · natural (unpainted) · 0.5 BMT · solid

Confirm availability with supplier

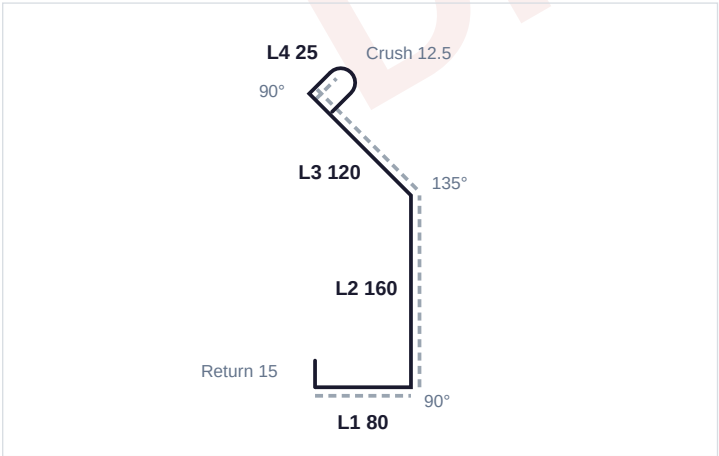

Reference side (unpainted — no colour face) — right side travelling L1 -> L4

DIMENSIONS

L1 80 mm
L2 160 mm
L3 120 mm
L4 25 mm
B1 90° fold left
B2 135° fold left
B3 90° fold right
Start: open return 15 mm, folds left
End: crush fold (closed hem) 12.5 mm, folds right
Indicative girth 412.5 mm

QTY	FINISHED LENGTH (mm)	LM	HANDLING
3 ×	2,400	7.200	-

3 pieces · 7.200 LM

DRAFT


DRAFT FLASHING ORDER

FO-001001 · export 1 · 2026-10-14 (continued)

P4 — Std valley gutter (example)

COLORBOND · Basalt · 0.55 BMT · solid

Confirm availability with supplier

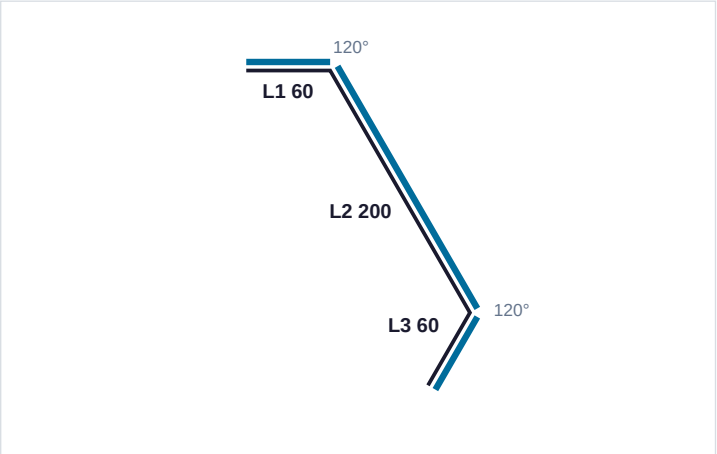

Painted (colour) face — left side travelling L1 -> L3

DIMENSIONS

L1 60 mm
L2 200 mm
L3 60 mm
B1 120° fold right
B2 120° fold right
Start: plain
End: plain
Indicative girth 320 mm

QTY	FINISHED LENGTH (mm)	LM	HANDLING
1 ×	4,400	4.400	-


1 piece · 4.400 LM

P5 — Vent flashing (perforated)

COLORBOND · Surfmist · 0.55 BMT

PERFORATED · round holes 3 mm @ 6 mm pitch · staggered rows · legs L2 · solid margin 10 mm

Confirm availability with supplier

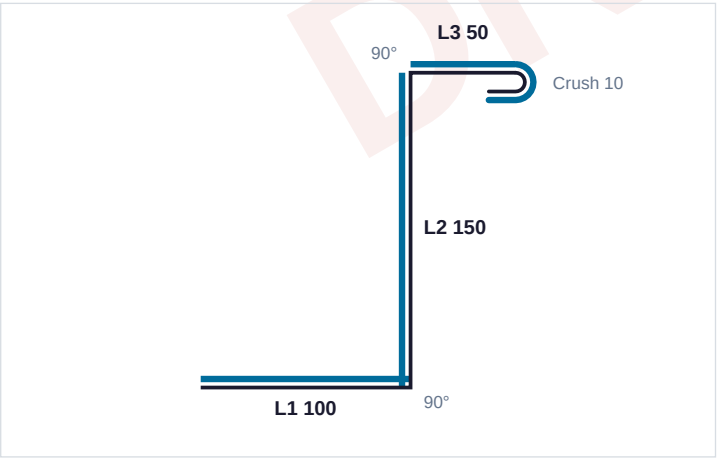

Painted (colour) face — left side travelling L1 -> L3

DIMENSIONS

L1 100 mm
L2 150 mm
L3 50 mm
B1 90° fold left
B2 90° fold right
Start: plain
End: crush fold (closed hem) 10 mm, folds right
Indicative girth 310 mm

QTY	FINISHED LENGTH (mm)	LM	HANDLING
2 ×	3,000	6.000	-

2 pieces · 6.000 LM

Order total: 18 pieces · 62.300 LM · 1 long piece flagged

This document lists quantities and profiles only. It is not a price or a contract. Confirm product availability, colour and fabrication allowances with the supplier.

DRAFT