MATERIAL ORDER

FO-001001 · export 1 · 2026-10-14

FROM
Blue Leaf Building (sandbox)
Sandbox address
00 0000 0000
office@example.invalid

SUPPLIER
Fielders (SANDBOX — not a real contact)
Attn: Sandbox orders
00 0000 0000
orders@example.invalid

JOB
Sandbox job — your drawings
Pickup
Branch: Sandbox branch (test only)
Site contact: Sandbox site lead 0400 000 000


Notes: TC-R04 evidence run — sandbox only, not a real order

All dimensions in mm. Flashing lengths are FINISHED order lengths. Girth is indicative only (no bend deduction) — supplier fabrication instructions take precedence. Timber, aluminium and board lengths are the STOCK lengths to supply; site cut lists and setout are in the separate site appendix, not part of this order.

P1 — Flashing 1

COLORBOND · Monument · 0.55 BMT · solid

Confirm availability with supplier

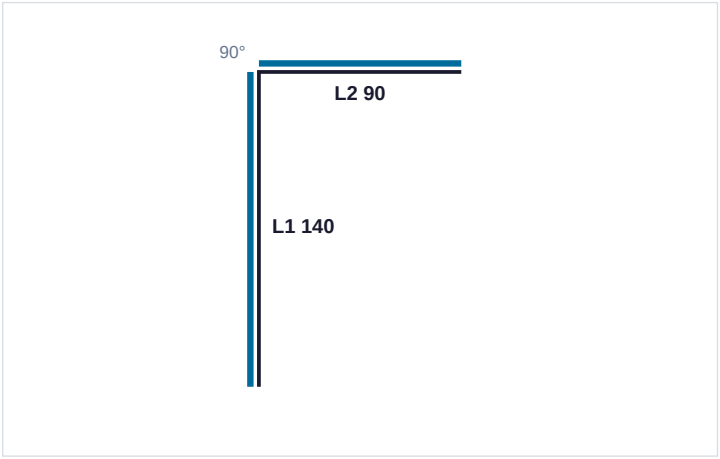

Painted (colour) face — left side travelling L1 -> L2

DIMENSIONS
L1 140 mm
L2 90 mm
B1 90° fold right
Start: plain
End: plain
Indicative girth 230 mm

QTY	FINISHED LENGTH (mm)	LM	HANDLING
1 ×	9,000	9.000	Long piece — handle with care
1 ×	3,200	3.200	-
1 ×	1,400	1.400	-

3 pieces · 13.600 LM

M1 — Aluminium angle 50 × 50 × 3

equal-angle 50 × 50 × 3 · 6500 mm lengths

Cutting: 3 mm kerf, 0 mm end trim

QTY	UNIT	SUPPLY	NOTE
1 ×	bar	equal-angle 50 × 50 × 3 — 6,500 mm length (no joins)	-

1 bar

M2 — Axon 133 smooth

James Hardie · Axon 133 smooth · 9 thick · 1200 wide · cover 1200 · vertical

Installation: source-pending (axon-vertical)

QTY	UNIT	SUPPLY	NOTE
4 ×	sheet	James Hardie Axon 133 smooth SKU 403932 — 2,750 × 1,200 mm	-

4 sheets

M3 — Rafters 90 × 45

90 × 45 · MGP10 · H3

Size: manual selection (not structurally checked)

QTY	UNIT	SUPPLY	NOTE
18 ×	piece	90 × 45 MGP10 H3 — 5,400 mm length	-

18 pieces

Order total: 3 flashing pieces · 13.600 LM · 1 long piece flagged · 1 bar · 18 pieces · 4 sheets

This document lists quantities and profiles only. It is not a price or a contract. Confirm product availability, colour and fabrication allowances with the supplier.